

Backup BRICs Series

BR450E/650E/850E

BRD0012EU-01

Wall-Mountable UPS to Make the Most of Your Work Space

CyberPower®
Reliability. Quality. Value.



The BRICs Series UPS supply home and office users reliable battery backup with EMI/RFI filters to eliminate line noise or disturbances. As Automatic Voltage Regulation (AVR) stabilizes the AC signal and maintains a safe voltage, the UPS could maintain safe power levels for the connected equipment without resorting to battery power. With the optional wall-mounted placement, it could make the most of your works place.

The included PowerPanel® Personal Edition management software showcases the feature-rich abilities such as input/output power voltage readings, self-diagnostics, and approximate battery backup time. As the patented GreenPower UPS™ Technology offers clean and stable battery backup, the BRICs Series UPS could improve the operating efficiency and eliminate the waste energy consumption.

Applications

- Home and Home Office
- Home Theater System
- Small Office

Series Features

- GreenPower UPS™ Technology
- Automatic Voltage Regulator (AVR)
- EMI, RFI, Surge and Spike Protection
- Auto-Restart/Auto-Charge
- USB Connectivity Port
- User-Replaceable Batteries
- Horizontal / Wall-mounted Use
- Cable Collector Included
- PowerPanel® Personal Edition Software

Energy-Saving

AVR

Surge Protection

Wall-Mountable

Cable Collector


USB Port to PC



GreenPower UPS™

ENERGY-SAVING TECHNOLOGY

The patented advanced energy-saving technology improves the operating efficiency and eliminates waste energy consumption.

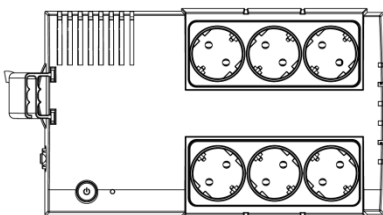

Cable Collector

PowerPanel® Personal Edition Management S/W



AUTO-SHUTDOWN SOFTWARE

CyberPower PowerPanel® Personal Edition Management Software, is compatible with Windows7, Vista, XP, 2000 Pro., ME, 98, Windows Server 2008, 2003, Mac and Linux.

**Software functions may vary due to firmware version and/or hardware constraints.*

Backup BRICs Series

BR450E/650E/850E


CyberPower®
Reliability. Quality. Value.

Technical Specification

Model	BR450E	BR650E	BR850E
Configuration			
Capacity (VA / Watts)	450 / 270	650 / 390	850 / 510
Energy-Saving Technology	Yes		
Input			
Frequency Range	47 Hz - 63 Hz (Auto Sensing)		
Output			
UPS Outlets (Numbers)	(6) Schuko or (6) FR or (6)UK (UK x 4+ IEC x 2) outlets		
On Battery Output Voltage	Simulated Sinewave at 230 Vac +/- 10%		
On Battery Output Frequency	50 Hz / 60 Hz +/- 1%		
Transfer Time (Typical)	4ms		
Overload Protection	On Utility: Circuit Breaker & Internal Current Limiting On Battery: Internal Current Limiting		
AVR	Single Boost		
Surge Protection and Filtering			
Surge Protection	Yes		
Physical			
Dimensions (H x W x D) (mm)	113.6 x 271 x 160.7		
Weight (kg)	4.4	5.5	6.4
Battery			
Sealed Maintenance Free Lead Acid Battery	12V / 4.5AH x 1	12V / 7AH x 1	12V / 8.5AH x 1
User Replaceable	Yes		
Typical Recharge Time	8 Hours		
Runtimes			
Half-load / Full-load (mins)	8 / 1	9/2	8/1
Status Indicators			
Indicators	Power On		
Audible Alarms	On Battery, Low Battery, Overload		
Communication			
PowerPanel® Personal Edition	Windows 7 / Vista / XP / 2000, Server 2008 / 2003 , Linux		
Management			
Self Test	Yes		
Auto-Charge / Auto-Restart	Yes		
Connectivity Ports	USB		

#All specifications are subject to change without notice. ©2012 Cyber Power Systems. All Trademarks are the property of their owners.

Packaging Content:



Product Unit



USB Cable



Cable Collector



User Manual



Software CD



DISTRIBUTED BY:

CyberPower's
Manufacturing
Facilities are
ISO 9001:2000,
ISO 14000, and
QC080000
Approved