

Backup DX Series

DX400E/600E/800E

The Most Reliable Yet Cost-Effective Battery Backup

Designed for home and office users, the DX Series UPS provides the most cost-effective battery backup for PCs and SOHO networks. With EMI/RFI filters eliminating line noise or disturbances, it could supply reliable backup during power interruptions, brownouts and blackouts. With the cutting-edge compact design, it could make the most of your works place.

The included PowerPanel® Personal Edition management software showcases the feature-rich abilities such as input/output power voltage readings, self-diagnostics, scheduled-shutdown, and approximate battery backup time. As the GreenPower UPS™ Technology offers clean and stable battery backup, the DX Series UPS could improve the operating efficiency and eliminate the waste energy consumption.

CyberPower®
Reliability. Quality. Value.



Applications

- Home and Home Office
- Home Theater System
- Small Office

Series Features

- GreenPower UPS™ Technology
- LED Status Indicators
- EMI, RFI, Surge and Lightning Spike Protection
- Auto-Restart/Auto-Charge
- USB Connectivity Port
- PowerPanel® Personal Edition Software

Energy-Saving


LED Indicator

EMI/RFI Filters


Light-Weight Design

3 Outlets

USB Port to PC

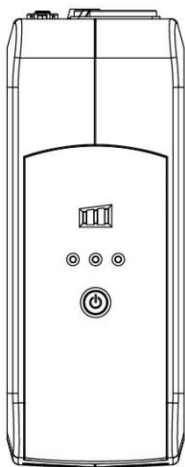

Top

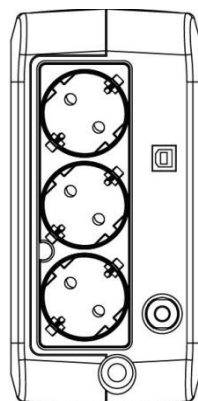

Back



GreenPower UPS™

ENERGY-SAVING TECHNOLOGY

The advanced energy-saving technology improves the operating efficiency and eliminates waste energy consumption.

PowerPanel® Personal Edition Management S/W



AUTO-SHUTDOWN SOFTWARE

CyberPower PowerPanel® Personal Edition Management Software, is compatible with Windows7, Vista, XP, 2000 Pro., ME, 98, Windows Server 2008, 2003, Mac and Linux.

Backup DX Series

DX400E/600E/800E




Technical Specification

Model	DX400E	DX600E	DX800E
Configuration			
Capacity (VA / Watts)	400 / 240	600 / 360	800 / 480
Energy-Saving Technology	Yes		
Input			
Frequency Range	47 Hz – 63 Hz (Auto Sensing)		
Output			
UPS Outlets (Numbers)	(3) Schuko or (3) FR		
On Battery Output Voltage	Simulated Sinewave at 230 Vac +/- 7%		
On Battery Output Frequency	50 Hz / 60 Hz +/- 1%		
Transfer Time (Typical)	10ms		
Overload Protection	On Utility: Circuit Breaker & Internal Current Limiting On Battery: Internal Current Limiting		
Surge Protection and Filtering			
Lightning / Surge Protection	Yes		
Physical			
Dimensions (H x W x D) (mm)	235 x 90 x 190		
Weight (kg)	2.7	3.4	3.9
Battery			
Sealed Maintenance Free Lead Acid Battery	12V / 4.5AH x 1	12V / 7AH x 1	12V / 8.5AH x 1
Typical Recharge Time	8 Hours		
Runtimes			
Half-load / Full-load (mins)	12 / 4	10 / 3	8 / 2
Status Indicators			
Indicators	Using AC, Using Battery, Fault, Battery Capacity		
Audible Alarms	On Battery, Low Battery, Overload		
Communication			
PowerPanel® Personal Edition	Windows 7 / Vista / XP / 2000, Server 2008 / 2003		
Management			
Auto-Charge / Auto-Restart	Yes		
Connectivity Ports	USB		

#All specifications are subject to change without notice. ©2011 CyberPower Systems. All Trademarks are the property of their owners.

Packaging Content:

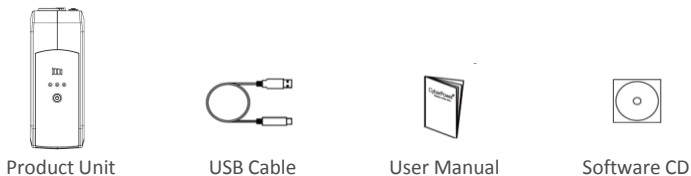

DISTRIBUTED BY:

CyberPower's
Manufacturing
Facilities are
ISO 9001:2000,
ISO 14000, and
QC080000
Approved

