

Backup Value GP LCD Series


Value1200E/1500E/2200E-GP

A Solid Power Protection from the Inside Out

CyberPower®
Reliability. Quality. Value.

The Value GP LCD Series UPS with GreenPower UPS™ Technology offers home and small office users clean and stable battery backup while the featured RJ11/RJ45 port ensures phone, fax, and modem lines are protected from surges. With Automatic Voltage Regulator (AVR) stabilizes the AC signal and maintains a safe voltage, this allows the UPS to maintain safe power levels for the connected equipment without resorting to battery power. The multifunction LCD readout provides immediate access to precise information of critical power/battery condition.

The included PowerPanel® Personal Edition management software showcases the feature-rich abilities such as input/output power voltage readings, self-diagnostics, scheduled-shutdown, and approximate battery backup time. With the Energy-Saving Technology, the Value GP LCD Series UPS could improve the operating efficiency and eliminate the waste energy consumption.

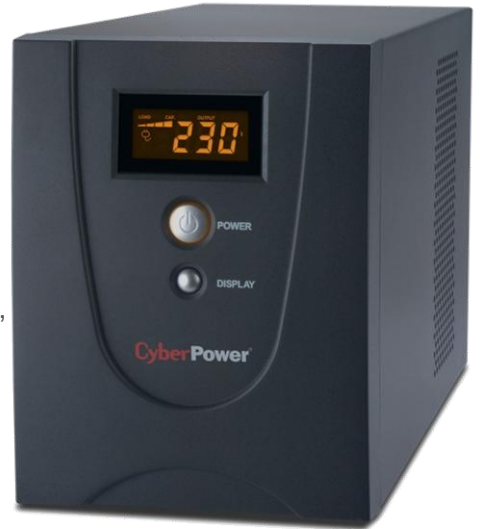

Applications

- Home and Home Office
- Home Theater System
- Small Office
- Medium Business

Series Features

- GreenPower UPS™ Technology
- Automatic Voltage Regulator (AVR)
- EMI, RFI, Surge and Lightning Spike Protection
- Phone/Fax/Modem/DSL/Network Protection
- Auto-Restart/Auto-Charge
- LCD Status Monitor
- USB & Serial Connectivity Ports
- User-Replaceable Batteries
- PowerPanel® Personal Edition Software

Energy-Saving


AVR

Surge Protection


Phone Line Protection

LCD Display

USB & Serial

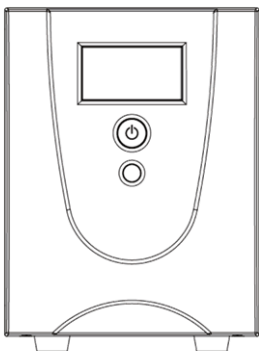

Front

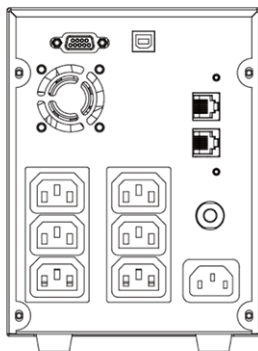

Back



GreenPower UPS™

ENERGY-SAVING TECHNOLOGY

The patented advanced energy-saving technology improves the operating efficiency and eliminates waste energy consumption.

PowerPanel® Personal Edition Management S/W



AUTO-SHUTDOWN SOFTWARE

CyberPower PowerPanel® Personal Edition Management Software, is compatible with Windows7, Vista, XP, 2000 Pro., ME, 98, Windows Server 2008, 2003, Mac and Linux.

Backup Value GP LCD Series

Value1200E/1500E/2200E-GP

CyberPower[®]
Reliability. Quality. Value.

Technical Specification

Model	VALUE1200E-GP	VALUE1500E-GP	VALUE2200E-GP
Configuration			
Capacity (VA / Watts)	1200 / 720	1500 / 900	2200 / 1320
Energy-Saving Technology	Yes		
Input			
Frequency Range	47 Hz – 63 Hz (Auto Sensing)		
Input Plug Type	IEC 320 C14		
Output			
UPS Outlets (Numbers)	(6) IEC		
On Battery Output Voltage	Simulated Sinewave at 230 Vac +/- 10%		
On Battery Output Frequency	50 Hz / 60 Hz +/- 1%		
Transfer Time (Typical)	4ms		
Overload Protection	On Utility: Circuit Breaker & Internal Current Limiting On Battery: Internal Current Limiting		
AVR	Single Boost		
Surge Protection and Filtering			
Lightning / Surge Protection	Yes		
DSL / Phone / FAX / Modem Protection	RJ11 / RJ45 (One In / One Out)		
Physical			
Dimensions (H x W x D) (mm)	180 x 140 x 326		
Weight (kg)	12.7	14	15.1
Battery			
Sealed Maintenance Free Lead Acid Battery	12V / 7AH x 2	12V / 8.5AH x 2	12V / 9AH x 2
User Replaceable	Yes		
Typical Recharge Time	8 Hours		
Runtimes			
Half-load / Full-load (mins)	10 / 3	9 / 2	7 / 1
Status Indicators			
Indicators	Power On, Using Battery		
Audible Alarms	On Battery, Low Battery, Overload		
Multi-function LCD Readout	Yes		
Communication			
PowerPanel [®] Personal Edition	Windows 7 / Vista / XP / 2000, Server 2008 / 2003		
Management			
Self Test	Yes		
Auto-Charge / Auto-Restart	Yes		
Connectivity Ports	USB, Serial		

#All specifications are subject to change without notice. ©2011 Cyber Power Systems. All Trademarks are the property of their owners.

Packaging Content:



Product Unit



USB Cable



Phone Cable



User Manual



Software CD



IECO/P
Power Cord

DISTRIBUTED BY:

CyberPower's
Manufacturing
Facilities are
ISO 9001:2000,
ISO 14000, and
QC080000
Approved

